


Signage Installation

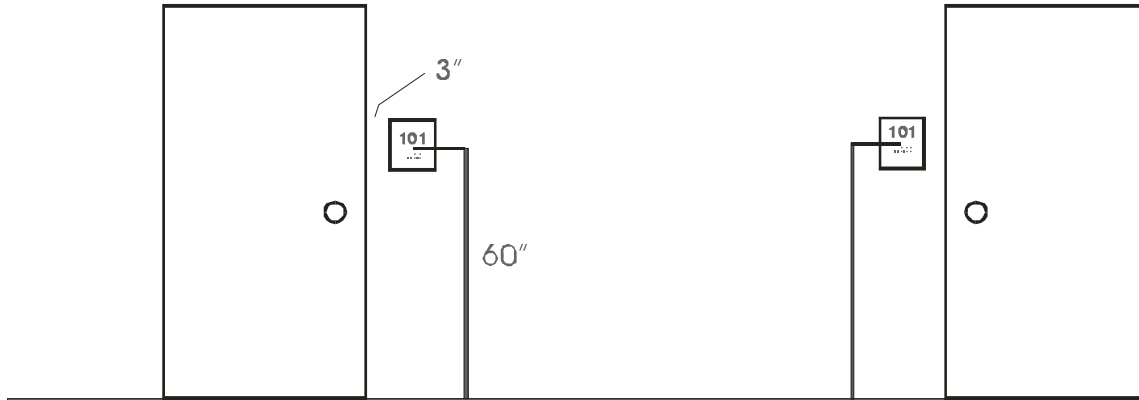

Installation of ADA compliant signs

(For permanent room, accessible entrances/spaces, toilets, etc.)

Where possible place sign **3"** from jamb or door trimming (unless told otherwise)
Never mount on door

Place signs **60"** from center of sign to floor
And adjacent to door latch. Where no wall
Space is available, adjacent to latch, place
Sign on nearest adjacent wall (unless told otherwise, ie. Some Elementary schools
require lower installation)

ADA Compliance states that the sign may be mounted with-in the parameter of
42" to 68", standard rule is 60" center of sign (wherever possible).

Installer:

- 1) Signs with foam tape, installer **MUST** add a liquid silicone such as 'Liquid Nails'. Foam tape is only meant to hold sign on wall while the silicone sets up.
- 2) Signs with holes through face should have vandal proof screws (snake eyes) with anchors drilled and tapped to wall
- 3) Signs with frame may have foam tape mounting with silicone or screws (philips) and anchors, per owners request

4Signsolutions.com 514 North 2nd Street Philadelphia, PA 19123 800-333-AWARD ext 134